

JAYEM CONCRETE BATCHING PLANTS


Compact Series JH - 24, JH - 30 & JH - 45



SPECIAL FEATURES

Twin Shaft:-

- ➔ Sicoma make for high to zero slump concrete.
- ➔ Internal walls are lined with wear resistant replaceable plates.
- ➔ Emergency manual discharge facility.

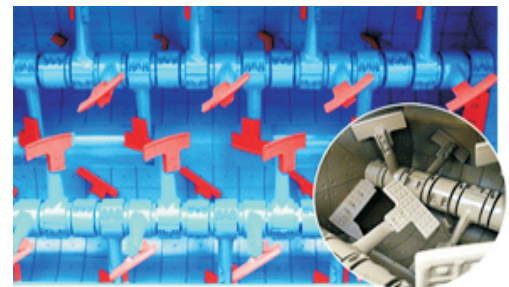

Pan Mixer:-

- ➔ Latest design with wear- resistant bottom and side wall plates.
- ➔ Spring acting arms for better mixing and easy replacement of arms and tips.
- ➔ Easy to maintain.



JAYEM MANUFACTURING COMPANY PVT. LTD.

AN ISO 9001:2000 COMPANY

Control Panel:-

PLC Based control panel.
 All motors are protected through overload protection/MCB'S.
 Easy to calibrate gate inching facility for weighing accuracy.
 Auto & manual Operations.

**Benefits:-**

Robust and steady structure.
 Easy to erect & operate.
 Low Maintenance & running.
 Single Weighing and conveyor Belt for faster Output.
 Easy Mobility & shifting.

TECHNICAL SPECIFICATION:-

MODEL	JH-24	JH-30	JH-45
Capacity(Cum/hr)	24	30	45
Input capacity in liters	600	750	1125
Output capacity in liters	400	500	750
Number of batcher/Hr	60	60	60
Mixer H.P	20	25	40
Belt conveyor H.P	7.5	10	12.5
Cement screw conveyor H.P	10	10	12.5
Discharge Height(Meters)	3.5	3.5	3.5

OPTIONALS:-

Control cabin.
 Admixture dosing system.
 Cement silo
 SCADA based controller.
 Display Monitor.
 Printer

JAYEM
 MANUFACTURING
 COMPANY PVT. LTD.
 AN ISO 9001:2000 COMPANY

Head Office:-
 C-99, Sector-4, noida-201301(UP)
 INDIA
 Mob:+91-9810764683, 9810388900

Works:-
 B2/10, Site-B, Surajpur, Industrial
 area, Greater Noida (UP) India
 Mob: 9654959011,9810388900
 Email: jayempl.acd@gmail.com